



Mini front and rear-view camera

CAM-E-M240 (black)

Delivery content

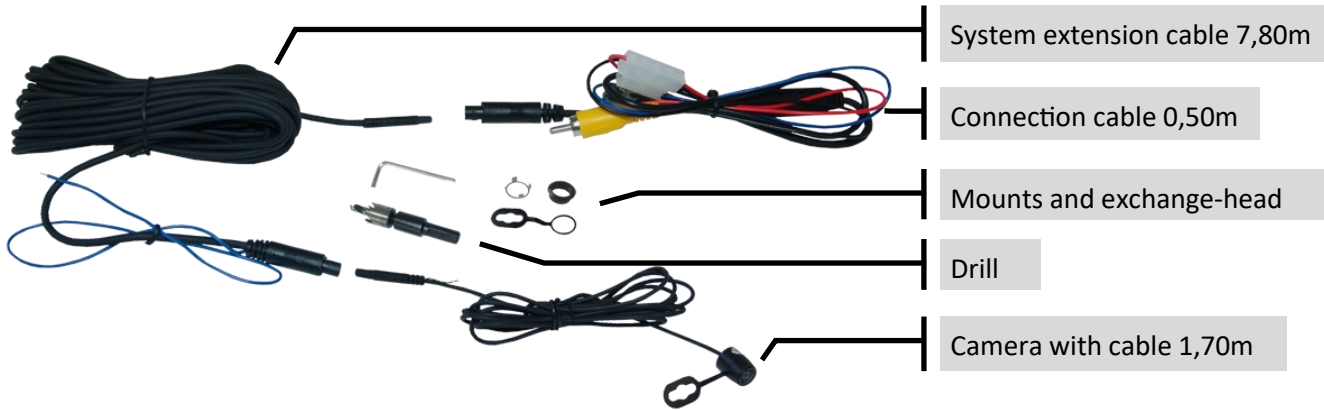

Installation

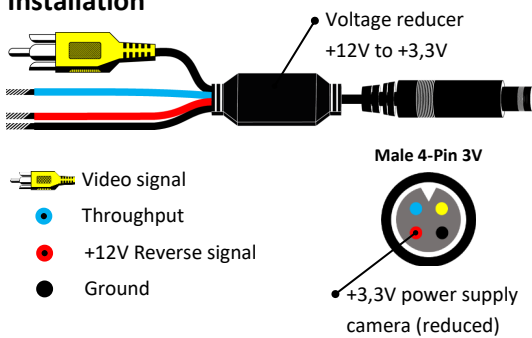

Camera not suitable for permanent operation!

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid errors in the vehicle computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation.

Otherwise the camera will inevitably become moist inside sooner or later.

Product features

- Mini dual-head camera NTSC
- Very small diameter - only 12.5mm
- Usable as butterfly or installation camera - screwable exchange head
- Various mounts and a drill are included
- Usable also as front or side camera (mirroring switchable)
- Video-connection male cinch
- Guide lines, optional disengageable
- 1/4inch CMOS low-light sensitive sensor
- Angle H=135°, V=105°, D=175°
- Water resistance IP69K
- Power supply **+12V DC (6 ~ 16V)**
- Operating voltage camera **+3.3V DC**
- Power consumption 35-55mAh
- Cable length (total) 10m
- Temperature range -30° to +75°C
- Dimensions Case 15 x 12.5 x 12.5mm (W x H x D)

Installation position



Camera configuration (cut cable loops if required)

With guide-lines



Without guide-lines



Mirroring - **rear-view camera**



Mirroring - **front camera**

