



AHD Mini front and rear-view camera

CAM-H115

Delivery content

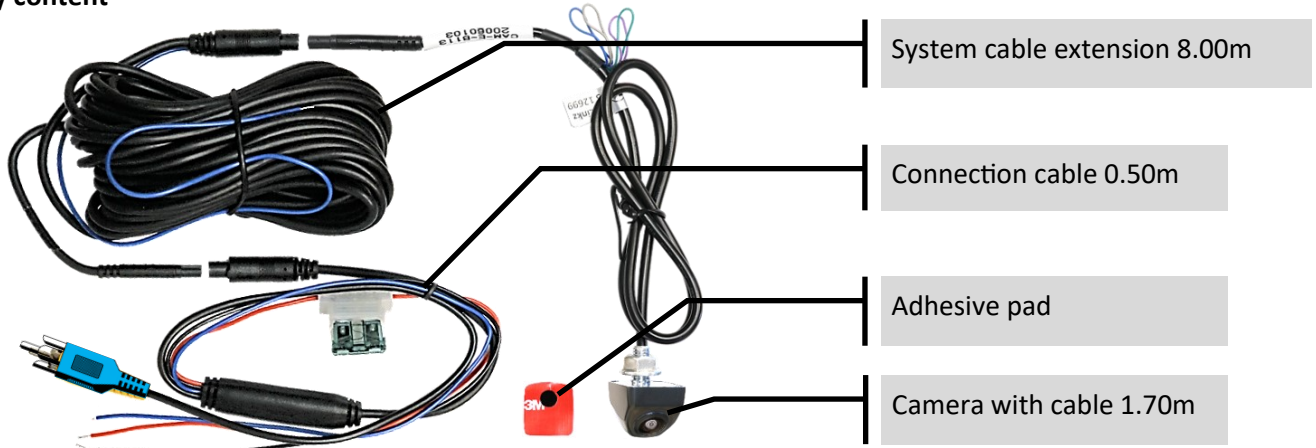

Installation

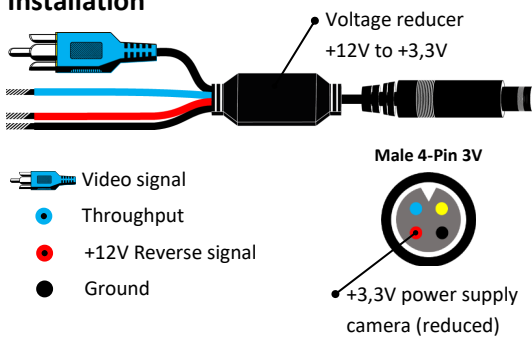

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid errors in the vehicle computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.

Product features

- Mini camera AHD in metal housing (black)
- Cable-guided thread tube with counter nut
- System cable with throughput, e.g. for reverse signal
- Horizontal mount-under and vertical mount-on possible
- Mirroring can be switched off - suitable also as front camera
- Sensor type AHD 536 CMOS 1/4 Inch PAL
- Resolution 720p
- Frame rate up to 25fps
- Light sensitivity 0.02 Lux
- Dynamic range 56dB
- Aperture F1.2
- Angle H = 130°, V = 80°, D = 160°
- Guide-lines can be switched off
- Protection class IP69K
- Suitable for permanent operation (connection to ACC)
- Power supply **+12/24V DC (6 ~ 28V)**
- Operating voltage camera **+3,3V DC**
- Current consumption 50mA
- Video connection RCA male connector
- System cable of camera 4pin 3V
- Diameter of camera connector 5mm
- Total cable length 10.20m
- Operating temperature range -30°C to +75°C
- Dimensions camera without thread tube 25 x 27.7 x 22mm (w x d x h)

Camera configuration (cut cable loops if required)

