


NavLinkz Vehicle-specific AHD/CVBS/PAL/NTSC camera


CAM-VSX or VSX-xx20 til 40

(CAM-VSX or set consisting of camera CAM-VSX and vehicle-specific number-plate illumination-glass PL-xxx)

Delivery content

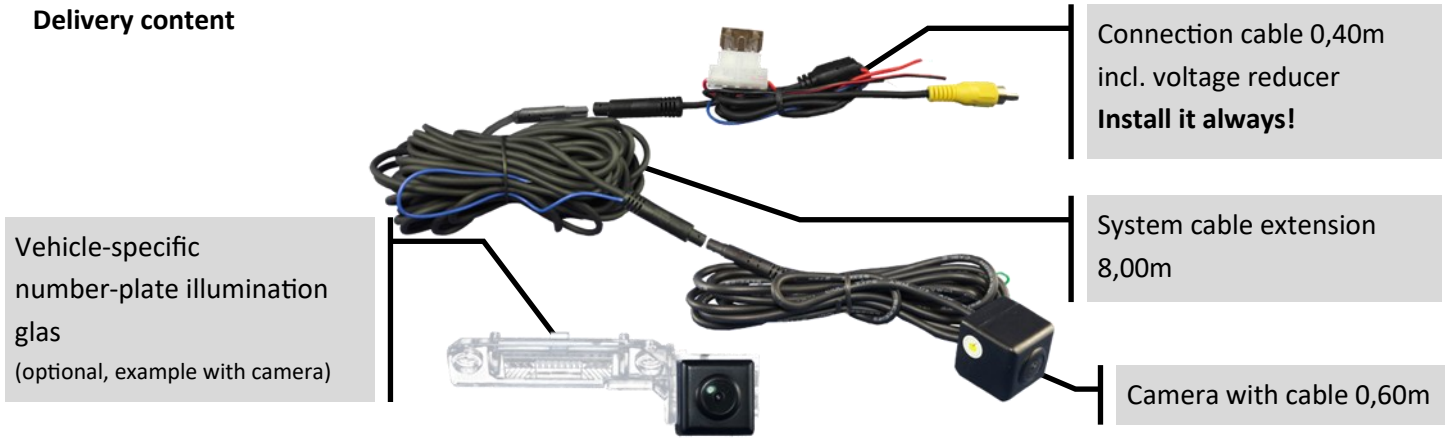

Installation

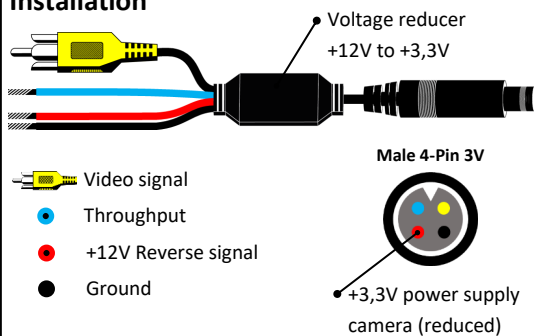

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid errors in the vehicle computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.


Produktfeatures

- Mini-camera for vehicle-specific number-plate illumination-glass
- Sensor-type CMOS 1/4 inch AHD/CVBS/PAL/NTSC switchable
- Resolution 1080p
- Frame rate 25fps (PAL) / 30fps (NTSC) switchable
- Aperture F1.36
- Light sensitivity 0.02 Lux
- Angle H=160°, V=90°, D=185°
- Mirrored picture (fixed)
- Guide-lines can be switched off
- Protection class IP69
- Mini 4pin-BM system harness, integrated throughput wire (blue)
- 9.80m total system cable length, consists of:
 - 1.40m cable fixed on camera to female 4pin-BM (Ø 5mm)
 - 8.00m extension cable male 4pin-BM to female 4pin-BM
 - 0.40m adapter male 4pin-BM to male RCA and power wires


Specifications

- Power supply +12V DC (6 ~ 16V)
- Operating voltage camera +3,3V DC
- Current consumption max. 65mA
- Operating temperature range -30°C bis +75°C
- Storage temperature range -40°C bis +80°C

Camera configuration (remove Jumper if required)

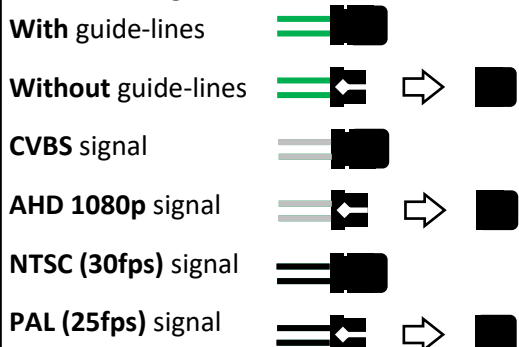

Camera not suitable for permanent operation!



Version 2511