

RLA-UCON-4P-PNP

PNP harness for connecting a


NTSC shutter camera with 4-pin connector and CV assignment

Compatible with Iveco Daily Hi-Connect and Fiat Ducato with Ucon7 Daiichi radio.

Coding by diagnosis necessary, if not already enabled by the factory.



Connection to the 52pin connector at the rear-side of the Daily Hi-Connect head unit or Ucon7 Daiichi radio.

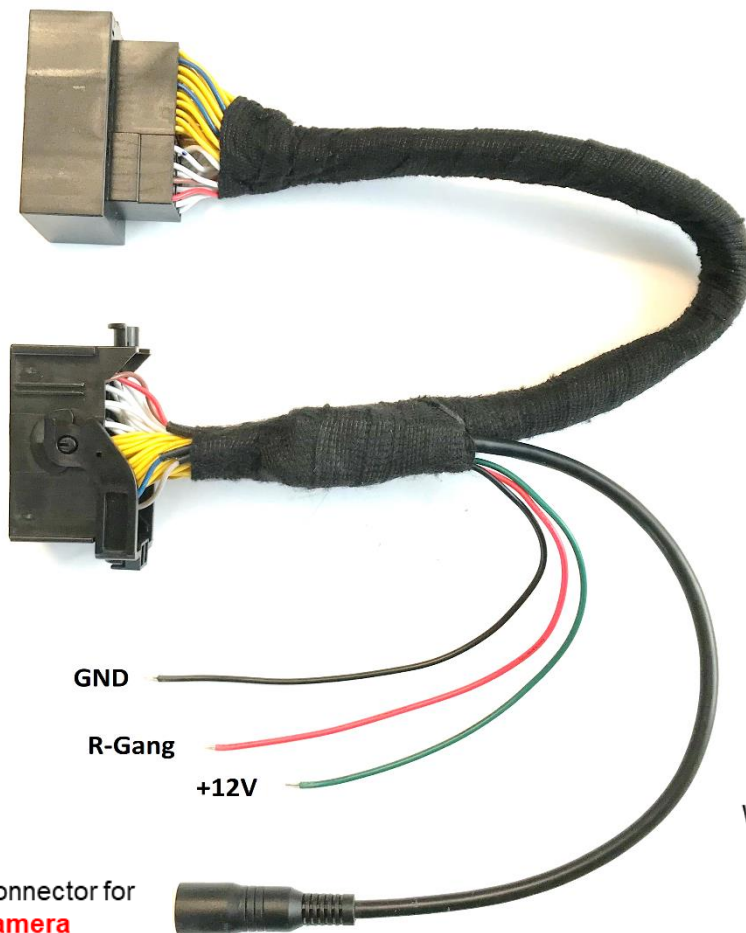

4pin CV connector for
shutter camera

Green wire (+12V):
Without heater to ACC (terminal 15) With
heater to steady plus (terminal 30)