

Brake light with rear-view camera

VAN-DLY6-A

Delivery content



Brake light and camera with 0,70m cable


Guidelines ON/OFF

Connection cable 0,40m

System cable extension 10,00m



Installation

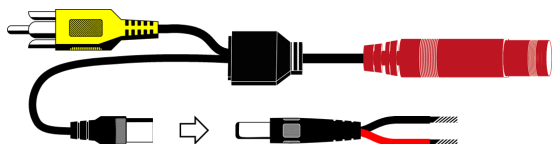

Video signal
Ground
Not in use
+12V R-gear signal/
power supply

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid vehicle computer errors.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.

Do not expose camera to high pressure cleaners.

Produktfeatures

- Camera in vehicle-specific 3rd brake light
- Mounted by exchanging the factory 3rd brake light
- Use of factory illumination
- Camera position 3 steps adjustable vertically
- Sensor-type CMOS 1/4 inch AHD NTSC
- Resolution 720p
- Aperture F1.2
- Light sensitivity 0.02 Lux
- Angle H = 100°, V = 60°, D = 120°
- Mirrored picture (fixed)
- Guide-lines can be switched off
- Protection class IP69
- 11.10m total system cable length, consists of:
 - 0.70m cable fixed on camera to male 4pin-BM (Ø 10mm)
 - 10.00m extension cable female 4pin-BM to male 4pin-BM
 - 0.40m adapter female 4pin-BM to male RCA (with adapter) and power wires (open cable ends)

Specifications



- Brake light with camera 572 x 63 x 120mm (W x H x D)
- Operating voltage +12V DC
- Current consumption max. 160mA
- Suitable for permanent power (ACC)
- Operating temperature range -30°C bis +75°C
- Storage temperature range -40°C bis +80°C

Camera configuration

With guide-lines



Without guide-lines



Version 2306