



Body-mounted AHD/CVBS camera with vehicle-specific holder

VAN-VN01-X

Lieferumfang

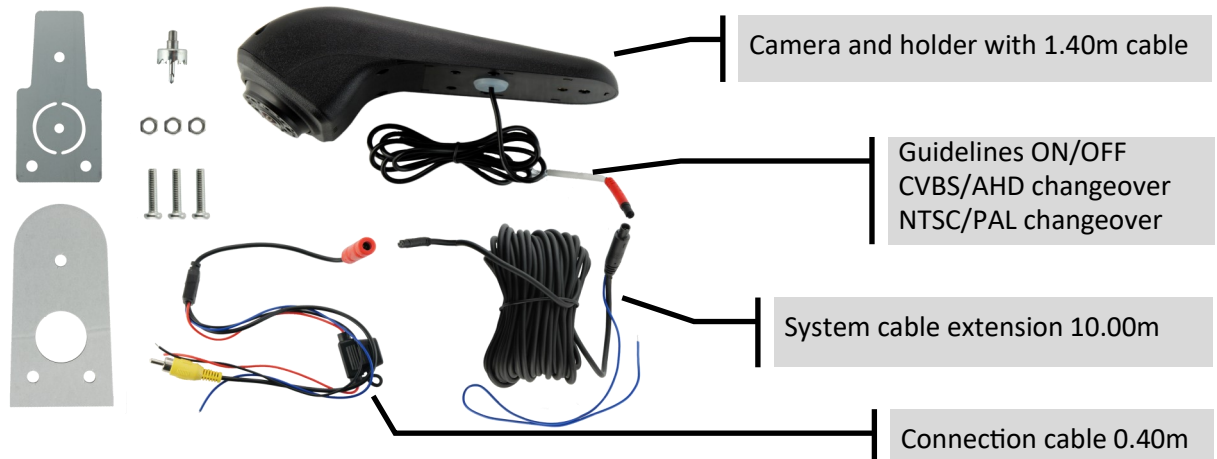

Installation

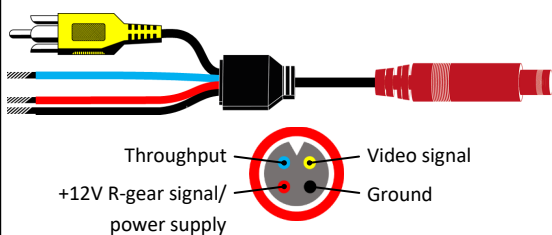

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid vehicle computer errors. The **throughput wire** can be used to connect the reverse gear lamp signal from back to front.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later. Do not expose camera to high pressure cleaners.

Camera configuration (remove Jumper if required)

With guide-lines		
Without guide-lines		
CVBS signal		
AHD 1080p signal		
NTSC (30fps) signal		
PAL (25fps) signal		

Camera not suitable for permanent operation!

Produktfeatures

- AHD/CVBS Camera in vehicle-specific holder
- Mounting on 3rd factory brake light
- Camera position adjustable in 3 steps vertically
- Sensor-type CMOS 1/4 inch AHD/CVBS/PAL/NTSC switchable
- Resolution 1080p
- Frame rate 25fps (PAL) / 30fps (NTSC) switchable
- Aperture F1.36
- Light sensitivity 0.02 Lux
- Infrared night vision LED
- Angle H=160°, V=90°, D=185°
- Mirrored picture (fixed)
- Guide-lines can be switched off
- Protection class IP69
- Mini 4pin-BM system harness, integrated throughput wire (blue)
- 11.80m total system cable length, consists of:
 - 1.40m cable fixed on camera to female 4pin-BM (Ø 5mm)
 - 10.00m extension cable male 4pin-BM to female 4pin-BM
 - 0.40m adapter male 4pin-BM to male RCA and power wires

Specifications

- Brake light with camera 84 x 68 x 208mm (W x H x D)
- Operating voltage +12V DC
- Current consumption max. 190mA
- Operating temperature range -30°C bis +75°C
- Storage temperature range -40°C bis +80°C

