


Vehicle-specific camera

VSA-FO08-N

Delivery content

Connection cable
0,40m

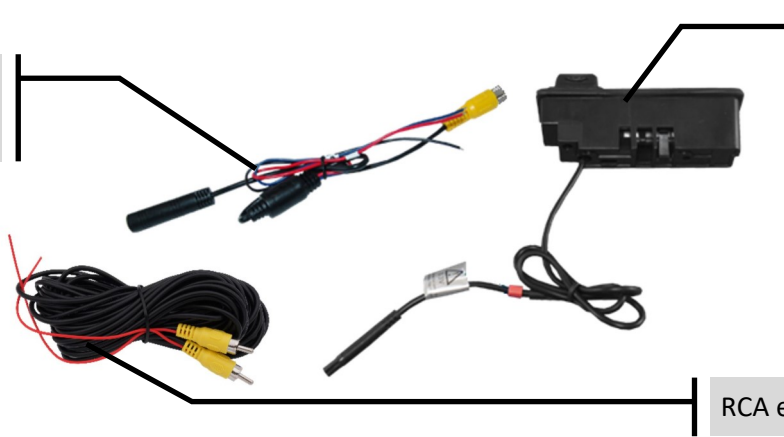

Exchange rear door
opener handle with
integrated camera
incl. 0,50m cable
(exemplifying figure)

RCA extension cable 8,0m


Product features

- Sensor type 1/3" CMOS
- Picture format AHD/CVBS NTSC
- Resolution 720p
- Min illumination 0.2 Lux
- Angle h=140°, v=80°, d=170°
- Mirror, optional switchable
- Parking guide lines, optional switchable
- RCA extension cable with throughput, e.g. for reverse signal
- Protection class IP68
- Camera colour black
- Total cable length 8,90m
- Video connector RCA male connector
- System connector camera 4pin BM
- Diameter camera connector 5mm
- Operating voltage +12V DC (6 ~ 16V)
- Current consumption 50mAh
- Power consumption 0.6W
- Operating temperature range -20°C to +70°C
- Storage temperature range -40°C to +85°C

Tip for dealers:

Inform your end customers that the rear-view camera
mustn't be cleaned by steam cleaner!

Installation

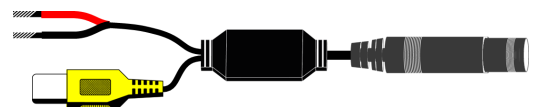

Video signal ● +12V Reverse signal
● Ground

Camera not suitable for permanent operation!

Note: If the camera is powered by reverse signal we recommend to install a relay between power supply of reverse signal and power supply of the camera to ensure a stable and uninterrupted power supply and avoid unwanted errors in the board computer.

Camera configuration (cut cable loops as needed)

With guide lines


Without guide lines

mirrored

unmirrored

AHD video

CVBS video

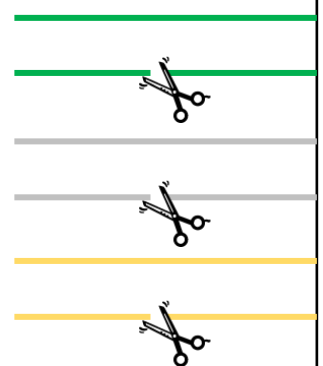

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.



10R-04.1484

