



# AHD Rear-view camera compatible to VW Amarok 2H

## VSA-VN60

### Delivery content

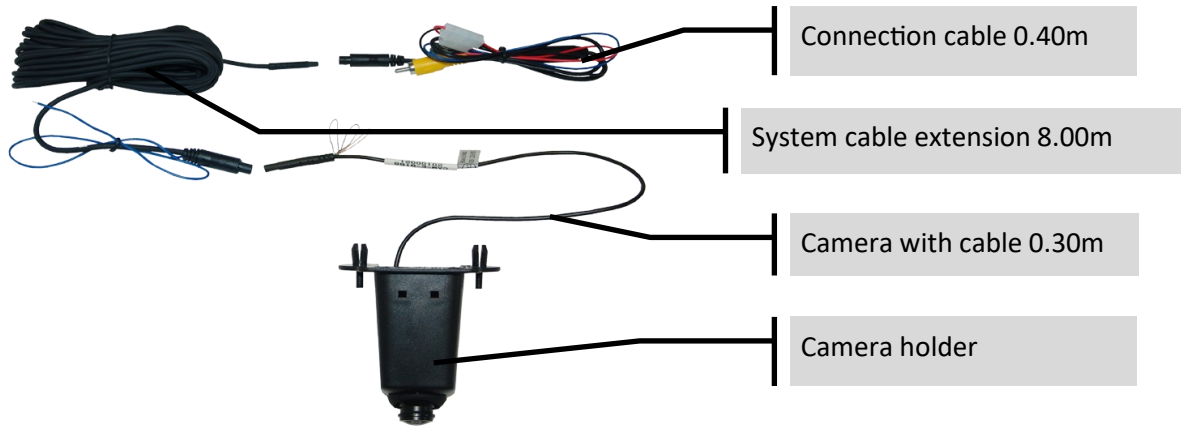

### Installation

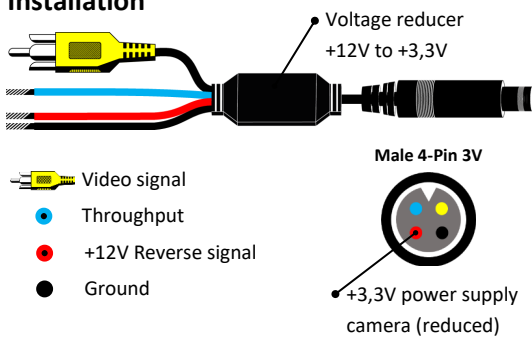

**Note:** If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid errors in the vehicle computer.

**In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.**

### Product features

- Mini ball rear-view camera AHD NTSC (black)
- Incl. vehicle-specific housing for factory camera position above the licence plate
- Suitable for VW Amarok 2H
- System cable with throughput wire, e.g. for reverse signal
- Sensor type AHD 536 CMOS 1/4 Inch NTSC
- Resolution 720p, 1200 TV lines
- Frame rate up to 30fps
- Light sensitivity 0.2 Lux
- Dynamic range 56dB
- Aperture F1.2
- Angle H = 180°, V = 125°, D = 210°
- Guide-lines can be switched off
- Protection class IP69K
- Suitable for permanent operation (connection to ACC)
- Operating voltage +12/24V DC (6 ~ 28V)
- Operating voltage camera +3,3V DC
- Current consumption 90mA
- Video connection RCA male connector
- System cable of camera 4pin 3V
- Diameter of camera connector 5mm
- Total cable length 8.70m
- Operating temperature range -30°C to +75°C
- Dimension (camera with housing) WxDxH 66x75x46mm

### Camera configuration (cut cable loops if required)

With guide-lines



Without guide-lines



Mirroring - rear-view camera



Mirroring - front camera



### Manual camera alignment

