


VSC-XXX


Delivery contents

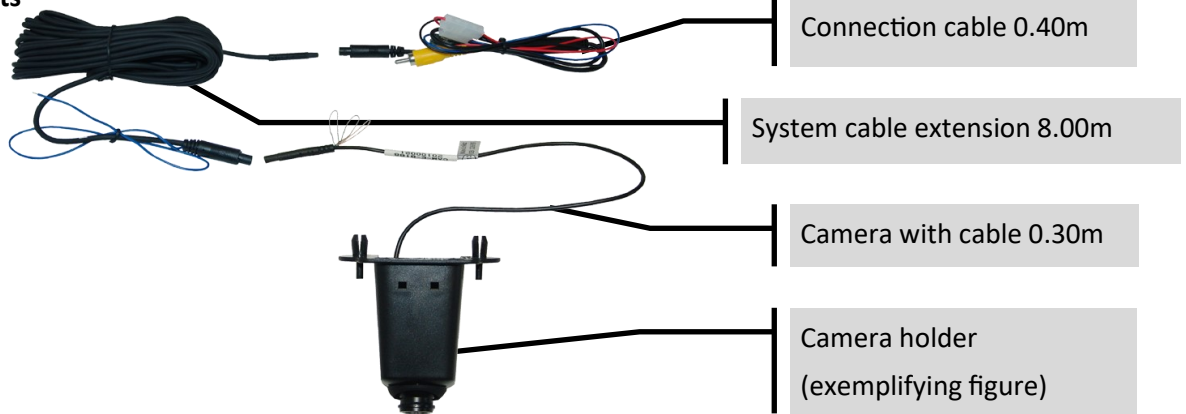

Product features

- Mini ball rear-view camera NTSC (black)
- Incl. vehicle-specific housing for factory camera position
- System cable with throughput wire
- Sensor type CMOS 1/4 inch HD low-light sensitive
- Bezel F1.2
- Minimum illumination 0.01Lux, 800 TV lines
- Angle H=180°, V=125°, D=210°
- Protection class IP 69K
- Suitable for permanent operation (connection to ACC)
- Operating voltage + 12/24V (6 ~ 28V)
- Current consumption 50mA
- Video connection: RCA male connector
- System cable of camera: 4pin 3V
- Diameter of camera connector 4.5mm
- Total cable length 8.70m
- Operating temperature range -30° to +75°C


Installation

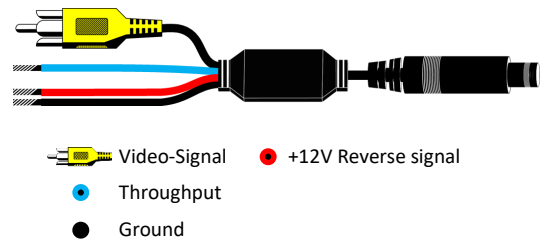

**Note:** If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid unwanted errors in the vehicle computer.

**In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.**

Camera configuration (is already preconfigured)

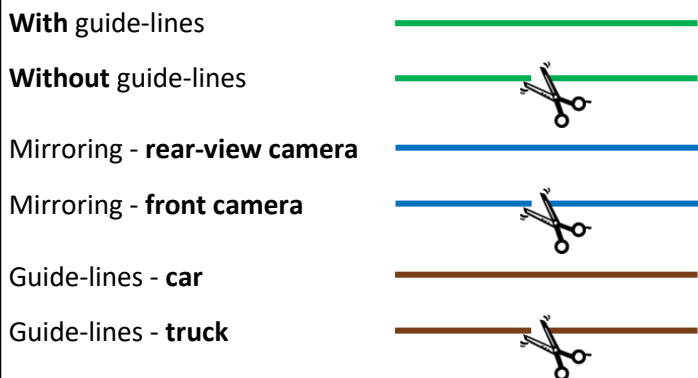

Manual camera alignment



03 12699

