


Rear-view camera compatible to VW Amarok 2H

VSC-VN60

Delivery contents

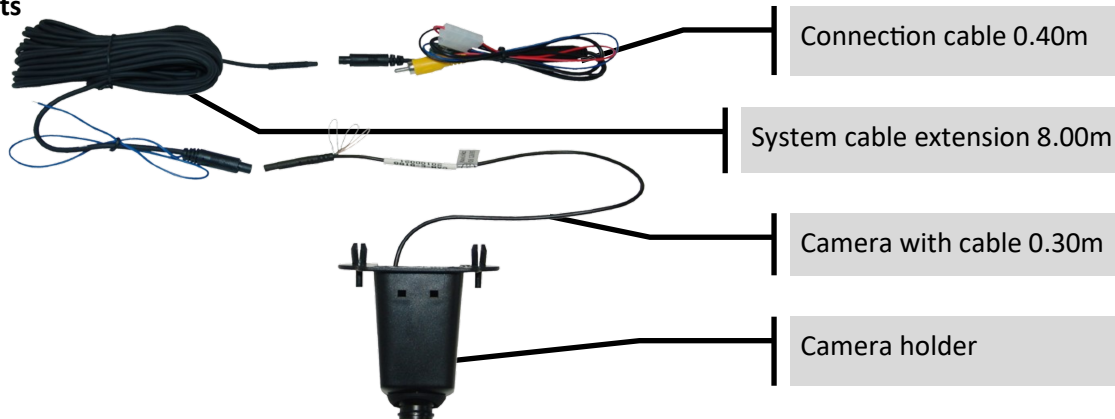

Product features

- Mini ball rear-view camera NTSC (black)
- Incl. vehicle-specific housing for factory camera position above the licence plate
- Suitable for VW Amarok 2H
- System cable with throughput wire, e.g. for reverse signal
- Sensor type CMOS 1/4 inch HD low-light sensitive
- 800 TV lines, Light sensitivity 0.01Lux
- Bezel F1.2
- Angle H=168°, V=118°, D=188°
- Guide-lines width selectable between car or truck
- Guide-lines can be switched off
- Protection class IP 69K
- Suitable for permanent operation (connection to ACC)
- Operating voltage + 12/24V (6 ~ 28V)
- Current consumption 50mA
- Video connection: RCA male connector
- System cable of camera: 4pin 3V
- Diameter of camera connector 5mm
- Total cable length 8.70m
- Operating temperature range -30° to +75°
- Dimension (camera with housing) WxDxH 66x75x46mm

Installation



- Video-Signal
- +12V Reverse signal
- Throughput
- Ground

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid unwanted errors in the vehicle computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.

Camera configuration (is already preconfigured)

With guide-lines



Without guide-lines



Mirroring - rear-view camera



Mirroring - front camera



Guide-lines - car



Guide-lines - truck



Manual camera alignment



03 12699

