

AC-MR-201

Mini relay

The mini relay AC-MR-201 is designed for use in all vehicles with 12V power supply. The relay works for changeover

- Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be away from heat sources.


Product features

- ✓ Ultracompact housing
- ✓ Waterproof moulded
- ✓ Low power consumption
- ✓ For all vehicles with 12 Volt power supply
- ✓ Contact switching load 10A
- ✓ Easy to install and no socket necessary



Wire colours and destination

Red	=	86	coil +12V
Black	=	85	coil ground
Yellow	=	30	middle contact
Yellow/Black	=	87a	normal closed contact
Yellow/Red	=	87	normal open contact

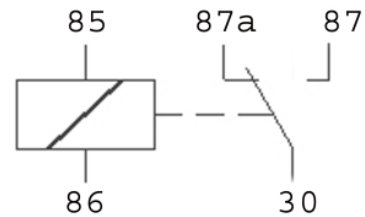

Technical Data

Voltage range	9V – 16V
Power consumption	55mA 12V 22°C / 65mA 14,5V 22°C
Maximum load	switching Max. 10 A
Temperature range	-40°C bis +85°C
Operate time max.	10 mS
Contact load	Max. 30A
Contact switching load	10A
Weight with cable	21g
Dimensions housing	24 x 21 x 10 mm (W x H x D)